CNP PUMPS PAKISTAN

SJ5-19

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump

CNP-M-001192

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
1 - 7.5 m³/h	**60 - 158 m**	**3 kW**	**3450 rpm**

Specifications

Series	**SJ (deep-well submersible)**
Size	**SJ5**
Stages	**19**
Mains frequency	**60 Hz**
Speed	**3450 rpm**
Motor power	**3 kW (4 hp)**
Max pressure	**24 bar**
Connection	**Thread Rp1½**
Data basis	**Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 7))**

Performance curve

Head versus flow - SJ5-19, 60 Hz

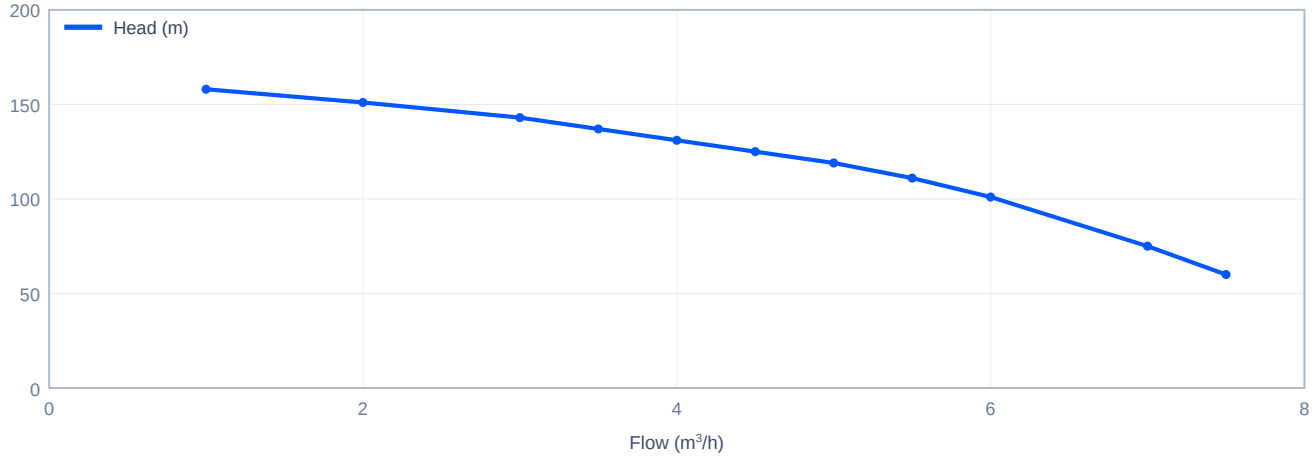

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
1	158
2	151
3	143
3.5	137
4	131

Flow (m^3/h)	Head (m)
4.5	125
5	119
5.5	111
6	101
7	75
7.5	60

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-15953. Contact: +92 345 9547419 sales@cnppakistan.com