

SJ5-22

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001881

Scan to open this online



FLOW RANGE

1 - 7.5 m³/h

HEAD RANGE

69 - 183 m

MOTOR

4 kW

SPEED


3450 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ5
Stages	22
Mains frequency	60 Hz
Speed	3450 rpm
Motor power	4 kW (5.5 hp)
Max pressure	24 bar
Connection	Thread Rp1½
Data basis	Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 7))

Performance curve

Head versus flow - SJ5-22, 60 Hz

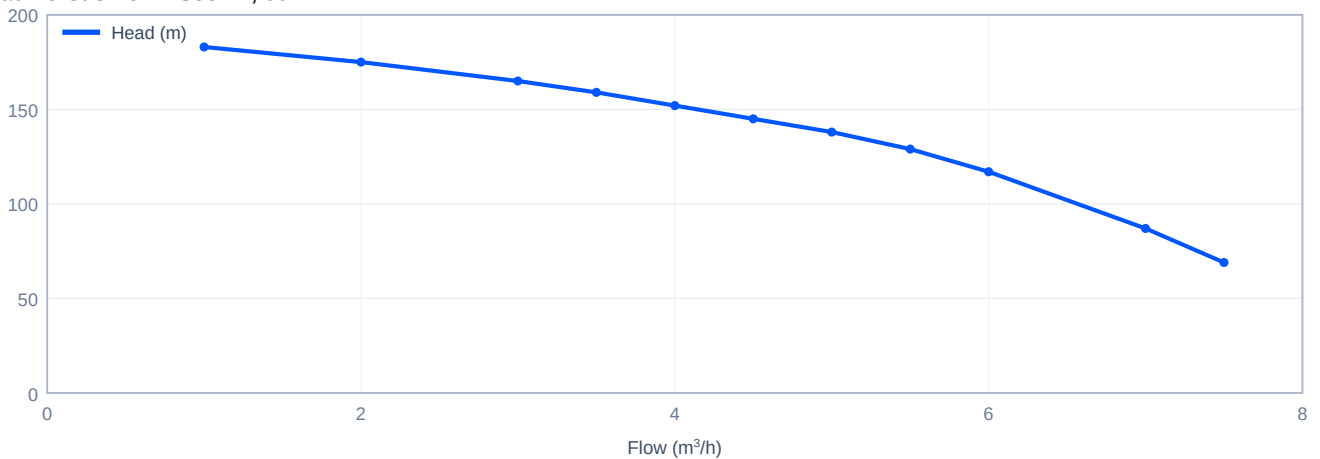

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1	183
2	175
3	165
3.5	159
4	152



Flow (m³/h)	Head (m)
4.5	145
5	138
5.5	129
6	117
7	87
7.5	69

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261030-27FDF. Contact: +92 345 9547419 sales@cnppakistan.com