

TD125-22G/4

TD (in-line circulation) | In-line single-stage circulation pump



CNP-M-000732

Scan to open this online



FLOW RANGE

40 - 200 m³/h

HEAD RANGE

16.7 - 26.7 m

MOTOR

15 kW

SPEED


1480 rpm

Specifications

Series	TD (in-line circulation)
Size	TD125
Mains frequency	50 Hz
Speed	1480 rpm
Motor power	15 kW
Max pressure	12 bar
Connection	Flange DN125 (PN16)
Weight	310 kg
Data basis	Published performance curve (Performance table, PDF p. 20)

Performance curve

Head versus flow - TD125-22G/4, 50 Hz

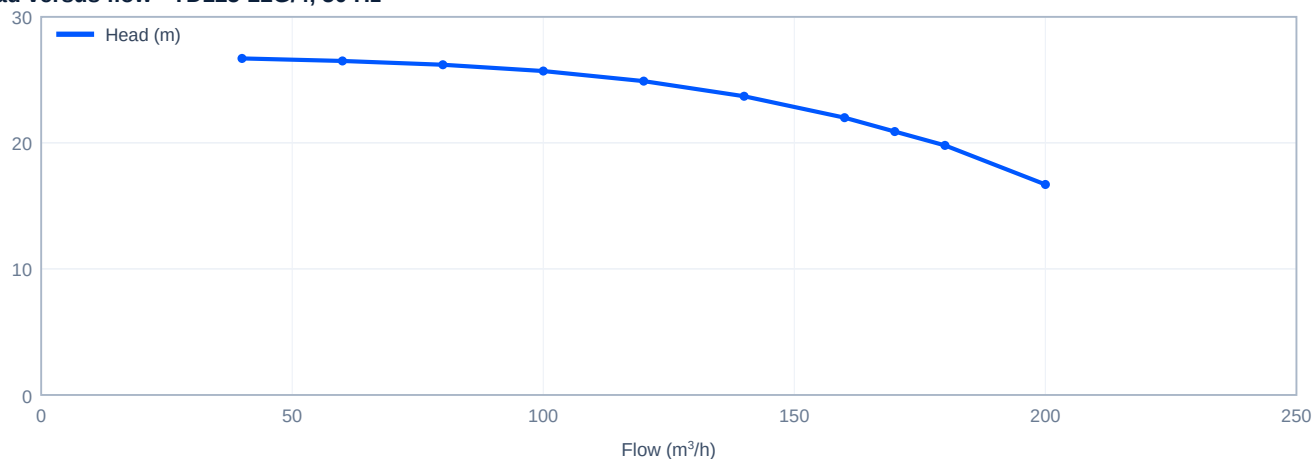

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
40	26.7
60	26.5
80	26.2
100	25.7
120	24.9



Flow (m³/h)	Head (m)
140	23.7
160	22
170	20.9
180	19.8
200	16.7

Dimensions (mm)

Code	Description	Value
D	D	350
B1	B1	314
B2	B2	261
B3	B3	236
B4	B4	208
B5	B5	230
H1	H1	215
H2	H2	292
H3	H3	1051
L1	L1	800
L2	L2	400
-	Net weight	310

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-51BA4. Contact: +92 345 9547419 sales@cnppakistan.com