

TD200-16/4

TD (in-line circulation) | In-line single-stage circulation pump



CNP-M-001524

Scan to open this online



FLOW RANGE

90 - 360 m³/h

HEAD RANGE

11.5 - 22.6 m

MOTOR

18.5 kW

SPEED


1480 rpm

Specifications

Series	TD (in-line circulation)
Size	TD200
Mains frequency	50 Hz
Speed	1480 rpm
Motor power	18.5 kW
Max pressure	12 bar
Connection	Flange DN200 (PN16)
Weight	417 kg
Data basis	Published performance curve (Performance table, PDF p. 22)

Performance curve

Head versus flow - TD200-16/4, 50 Hz

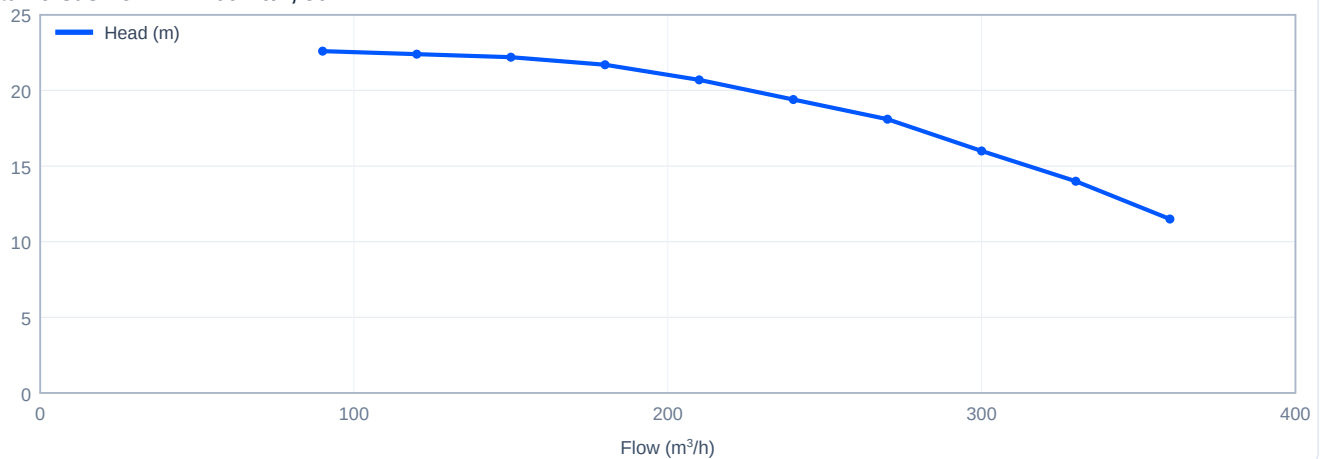

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
90	22.6
120	22.4
150	22.2
180	21.7
210	20.7



Flow (m³/h)	Head (m)
240	19.4
270	18.1
300	16
330	14
360	11.5

Dimensions (mm)

Code	Description	Value
D	D	350
B1	B1	355
B2	B2	273
B3	B3	278
B4	B4	219
B5	B5	360
H1	H1	270
H2	H2	415
H3	H3	1262
L1	L1	1000
L2	L2	500
-	Net weight	417

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-54EC9. Contact: +92 345 9547419 sales@cnppakistan.com