

TD200-36/4

TD (in-line circulation) | In-line single-stage circulation pump



CNP-M-000800

Scan to open this online



FLOW RANGE

90 - 360 m³/h

HEAD RANGE

33 - 39.6 m

MOTOR

45 kW

SPEED


1480 rpm

Specifications

Series	TD (in-line circulation)
Size	TD200
Mains frequency	50 Hz
Speed	1480 rpm
Motor power	45 kW
Max pressure	12 bar
Connection	Flange DN200 (PN16)
Weight	648 kg
Data basis	Published performance curve (Performance table, PDF p. 22)

Performance curve

Head versus flow - TD200-36/4, 50 Hz

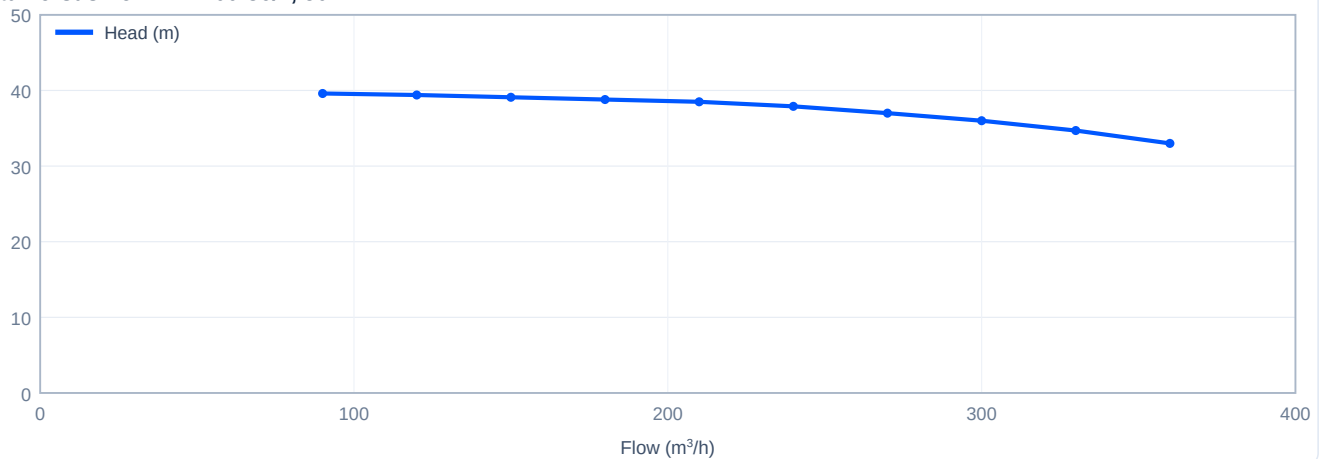

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
90	39.6
120	39.4
150	39.1
180	38.8
210	38.5



Flow (m³/h)	Head (m)
240	37.9
270	37
300	36
330	34.7
360	33

Dimensions (mm)

Code	Description	Value
D	D	450
B1	B1	445
B2	B2	334
B3	B3	303
B4	B4	252
B5	B5	360
H1	H1	270
H2	H2	445
H3	H3	1412
L1	L1	1100
L2	L2	550
-	Net weight	648

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-C7154. Contact: +92 345 9547419 sales@cnppakistan.com