

TD65-61G/2

TD (in-line circulation) | In-line single-stage circulation pump



CNP-M-000815

Scan to open this online



FLOW RANGE

10 - 70 m³/h

HEAD RANGE

47.6 - 64.5 m

MOTOR

18.5 kW

SPEED


2900 rpm

Specifications

Series	TD (in-line circulation)
Size	TD65
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	18.5 kW
Max pressure	12 bar
Connection	Flange DN65 (PN16)
Weight	208 kg
Data basis	Published performance curve (Performance table, PDF p. 16)

Performance curve

Head versus flow - TD65-61G/2, 50 Hz

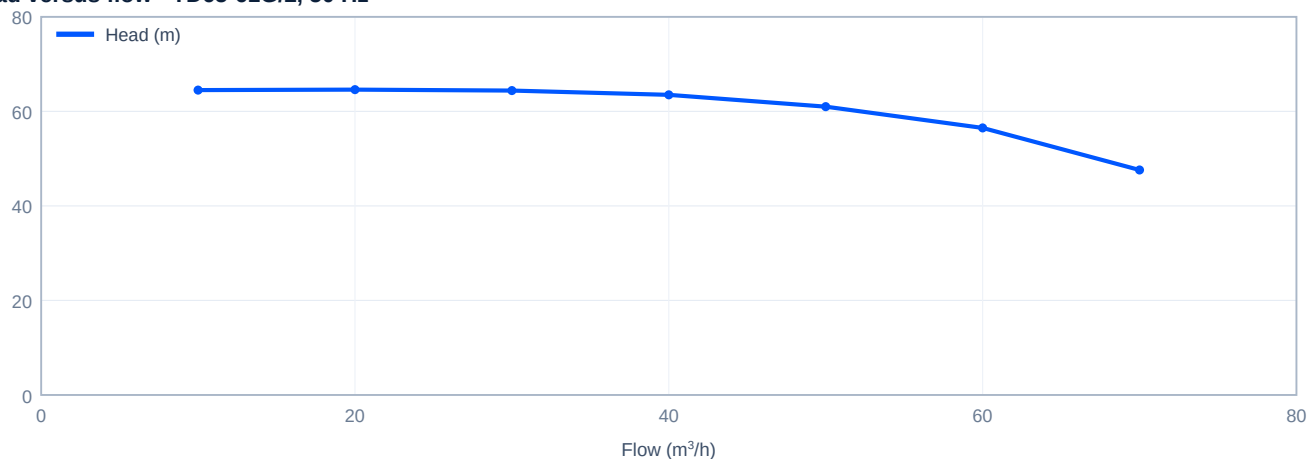

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	64.5
20	64.6
30	64.4
40	63.5
50	61



Flow (m³/h)	Head (m)
60	56.5
70	47.6

Dimensions (mm)

Code	Description	Value
D	D	350
B1	B1	314
B2	B2	261
B3	B3	174
B4	B4	162
B5	B5	160
H1	H1	125
H2	H2	228
H3	H3	897
L1	L1	475
L2	L2	238
-	Net weight	208

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-17B5A. Contact: +92 345 9547419 sales@cnppakistan.com