

TD100-11/2

TD (in-line circulation) | In-line single-stage circulation pump



CNP-M-000810

Scan to open this online



FLOW RANGE

10 - 80 m³/h

HEAD RANGE

6.3 - 17.2 m

MOTOR

3 kW

SPEED

3500 rpm

Specifications

Series **TD (in-line circulation)**

Size **TD100**

Mains frequency **60 Hz**

Speed **3500 rpm**

Motor power **3 kW**

Max pressure **12 bar**


Connection **Flange DN100 (PN16)**

Weight **65 kg**

Data basis **Published performance curve (Performance table, PDF p. 32)**

Performance curve

Head versus flow - TD100-11/2, 60 Hz

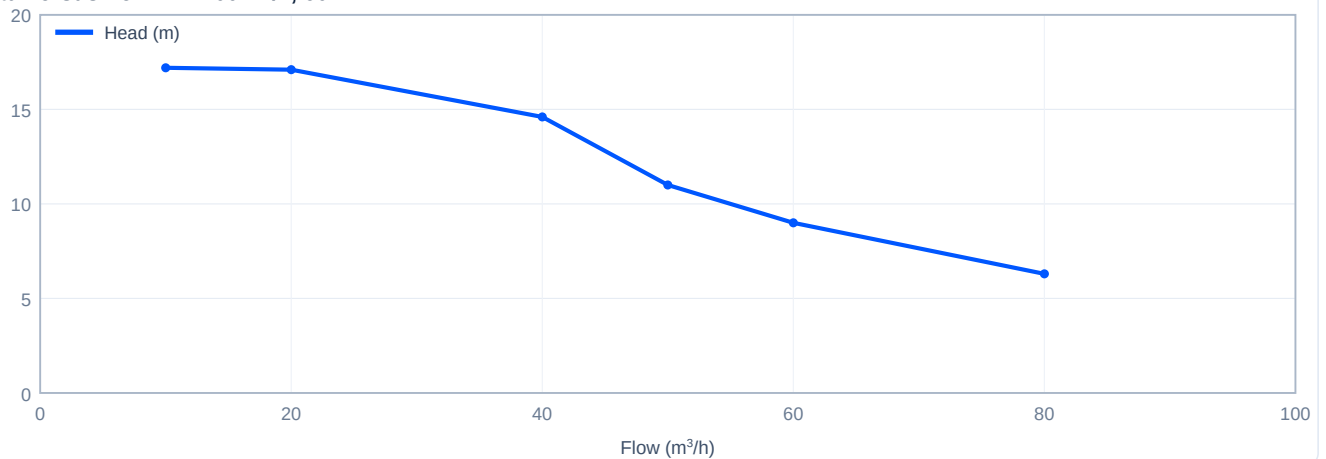

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	17.2
20	17.1
40	14.6
50	11
60	9



Flow (m³/h)	Head (m)
80	6.3

Dimensions (mm)

Code	Description	Value
D	D	160
B1	B1	215
B2	B2	190
B3	B3	134
B4	B4	101
B5	B5	160
H1	H1	105
H2	H2	190
H3	H3	640
L1	L1	450
L2	L2	225
-	Net weight	65

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-7ED39. Contact: +92 345 9547419 sales@cnppakistan.com