

TD150-36/4

TD (in-line circulation) | In-line single-stage circulation pump



CNP-M-001779

Scan to open this online



FLOW RANGE

30 - 260 m³/h

HEAD RANGE

31.9 - 39.7 m

MOTOR

37 kW

SPEED


1750 rpm

Specifications

Series	TD (in-line circulation)
Size	TD150
Mains frequency	60 Hz
Speed	1750 rpm
Motor power	37 kW
Max pressure	12 bar
Connection	Flange DN150 (PN16)
Weight	508 kg
Data basis	Published performance curve (Performance table, PDF p. 34)

Performance curve

Head versus flow - TD150-36/4, 60 Hz

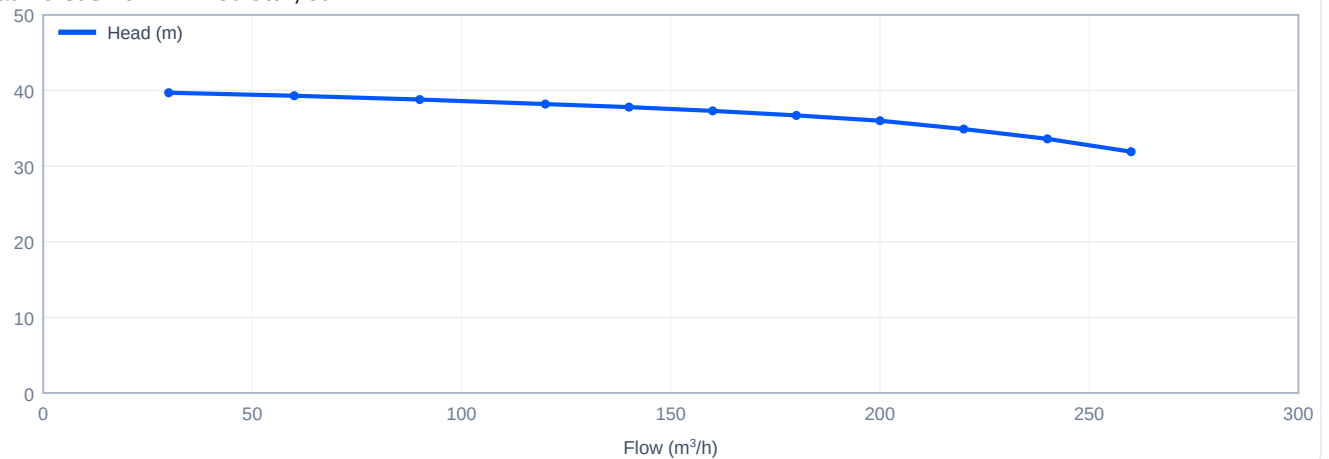

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
30	39.7
60	39.3
90	38.8
120	38.2
140	37.8



Flow (m³/h)	Head (m)
160	37.3
180	36.7
200	36
220	34.9
240	33.6
260	31.9

Dimensions (mm)

Code	Description	Value
D	D	450
B1	B1	450
B2	B2	325
B3	B3	267
B4	B4	248
B5	B5	230
H1	H1	230
H2	H2	288
H3	H3	1192
L1	L1	900
L2	L2	450
-	Net weight	508

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-E5B25. Contact: +92 345 9547419 sales@cnppakistan.com