

TD200-12.5/4

TD (in-line circulation) | In-line single-stage circulation pump



CNP-M-001889

Scan to open this online



FLOW RANGE

160 - 480 m³/h

HEAD RANGE

6.3 - 17.4 m

MOTOR

22 kW

SPEED


1750 rpm

Specifications

Series	TD (in-line circulation)
Size	TD200
Mains frequency	60 Hz
Speed	1750 rpm
Motor power	22 kW
Max pressure	12 bar
Connection	Flange DN200 (PN16)
Weight	431 kg
Data basis	Published performance curve (Performance table, PDF p. 35)

Performance curve

Head versus flow - TD200-12.5/4, 60 Hz

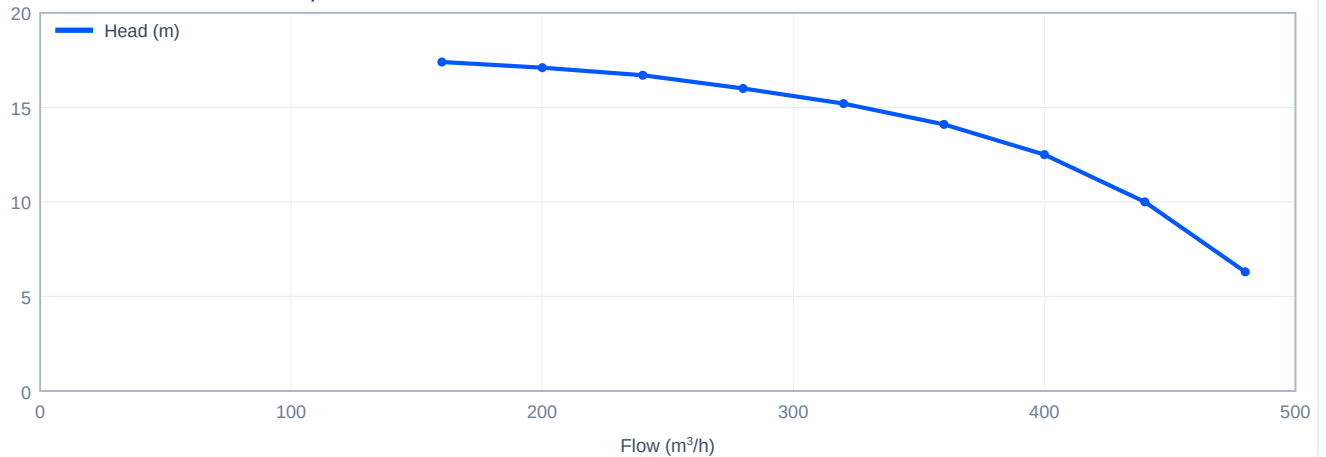

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
160	17.4
200	17.1
240	16.7
280	16
320	15.2



Flow (m³/h)	Head (m)
360	14.1
400	12.5
440	10
480	6.3

Dimensions (mm)

Code	Description	Value
D	D	350
B1	B1	360
B2	B2	280
B3	B3	278
B4	B4	219
B5	B5	360
H1	H1	270
H2	H2	415
H3	H3	1300
L1	L1	1000
L2	L2	500
-	Net weight	431

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261030-8207D. Contact: +92 345 9547419 sales@cnppakistan.com