

TD200-32/4

TD (in-line circulation) | In-line single-stage circulation pump



CNP-M-000691

Scan to open this online



FLOW RANGE

160 - 480 m³/h

HEAD RANGE

26.7 - 37.8 m

MOTOR

55 kW

SPEED


1750 rpm

Specifications

Series	TD (in-line circulation)
Size	TD200
Mains frequency	60 Hz
Speed	1750 rpm
Motor power	55 kW
Max pressure	12 bar
Connection	Flange DN200 (PN16)
Weight	707 kg
Data basis	Published performance curve (Performance table, PDF p. 35)

Performance curve

Head versus flow - TD200-32/4, 60 Hz

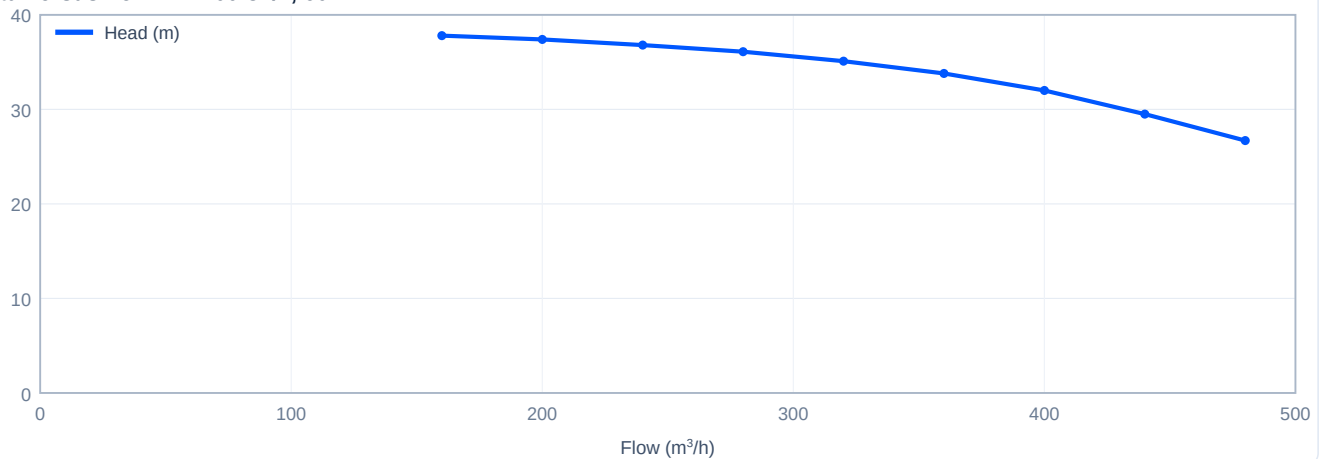

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
160	37.8
200	37.4
240	36.8
280	36.1
320	35.1



Flow (m³/h)	Head (m)
360	33.8
400	32
440	29.5
480	26.7

Dimensions (mm)

Code	Description	Value
D	D	550
B1	B1	490
B2	B2	365
B3	B3	303
B4	B4	252
B5	B5	360
H1	H1	270
H2	H2	445
H3	H3	1488
L1	L1	1100
L2	L2	550
-	Net weight	707

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-5590A. Contact: +92 345 9547419 sales@cnppakistan.com