

TD65-100/2

TD (in-line circulation) | In-line single-stage circulation pump



CNP-M-001252

Scan to open this online



FLOW RANGE

10 - 80 m³/h

HEAD RANGE

94 - 107.6 m

MOTOR

37 kW

SPEED

3500 rpm

Specifications

Series TD (in-line circulation)

Size TD65

Mains frequency 60 Hz

Speed 3500 rpm

Motor power 37 kW

Max pressure 12 bar


Connection Flange DN65 (PN16)

Weight 328 kg

Data basis Published performance curve (Performance table, PDF p. 30)

Performance curve

Head versus flow - TD65-100/2, 60 Hz

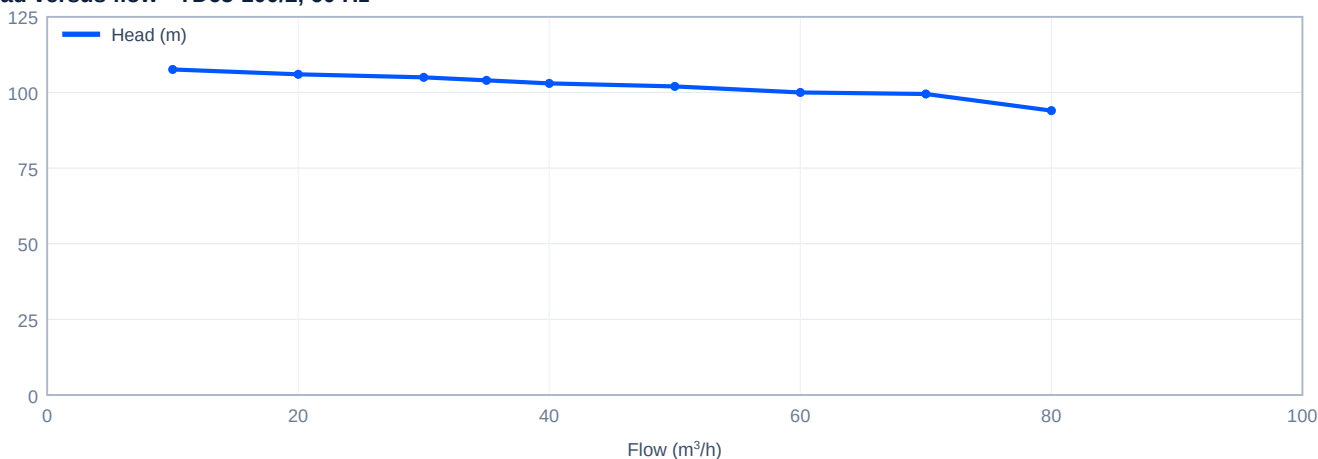

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	107.6
20	106
30	105
35	104
40	103



Flow (m³/h)	Head (m)
50	102
60	100
70	99.5
80	94

Dimensions (mm)

Code	Description	Value
D	D	400
B1	B1	400
B2	B2	310
B3	B3	179
B4	B4	167
B5	B5	144
H1	H1	125
H2	H2	262
H3	H3	1037
L1	L1	475
L2	L2	238
-	Net weight	328

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-A1C09. Contact: +92 345 9547419 sales@cnppakistan.com