

TDE50-35G/2

TDE (variable-frequency in-line) | Variable-frequency in-line single-stage pump



CNP-M-000695

Scan to open this online



FLOW RANGE

5 - 40 m³/h

HEAD RANGE

32.2 - 36.3 m

MOTOR

5.5 kW

SPEED


2900 rpm

Specifications

Series	TDE (variable-frequency in-line)
Size	TDE50
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	5.5 kW
Max pressure	12 bar
Connection	Flange DN50 (PN16)
Weight	86 kg
Data basis	Published performance curve (Performance table, PDF p. 8)

Performance curve

Head versus flow - TDE50-35G/2, 50 Hz

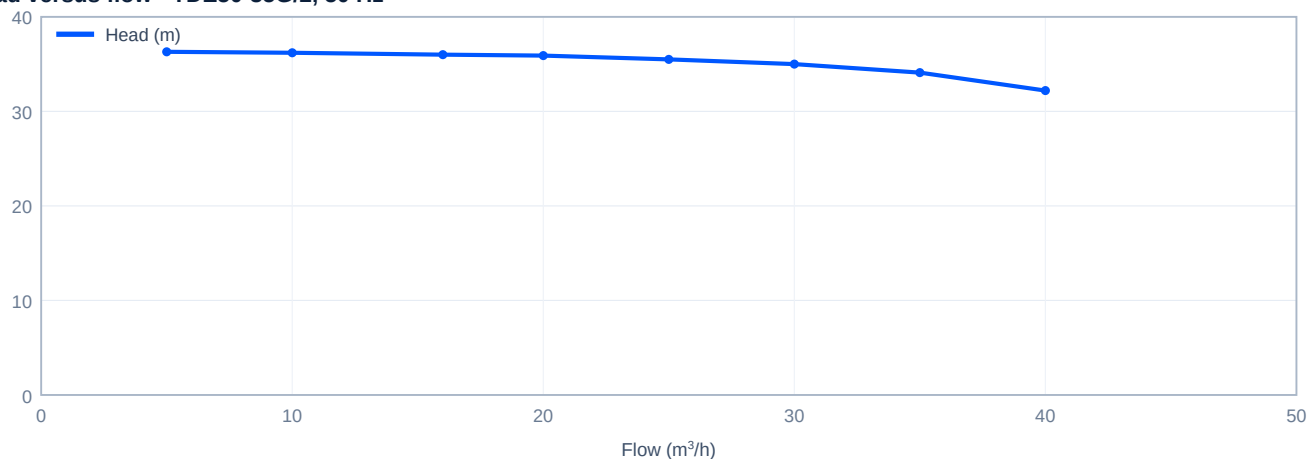

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
5	36.3
10	36.2
16	36
20	35.9
25	35.5



Flow (m³/h)	Head (m)
30	35
35	34.1
40	32.2

Dimensions (mm)

Code	Description	Value
D1	D1	200
D2	D2	208
B1	B1	260
B2	B2	263
B3	B3	118
B4	B4	109
B5	B5	144
H1	H1	105
H2	H2	175
H3	H3	663
L1	L1	340
L2	L2	170
-	Net weight	86

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-C1B1B. Contact: +92 345 9547419 sales@cnppakistan.com