CNP PUMPS PAKISTAN

CDLK1-110/11

CDLK / CDLKF (immersion) | Vertical multistage centrifugal pump

CNP-M-001162


Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
0.6 - 2 m³/h	73 - 95 m	1.1 kW	3500 rpm

Specifications

Series	**CDLK / CDLKF (immersion)**
Size	**CDLK1**
Stages	**11**
Mains frequency	**60 Hz**
Speed	**3500 rpm**
Motor power	**1.1 kW (1.5 hp)**
Max pressure	**21 bar**
Connection	**Thread G1 1/4"**
Weight	**22 kg**
Data basis	**Published performance curve (Performance table, printed pp. 31–32)**

Performance curve

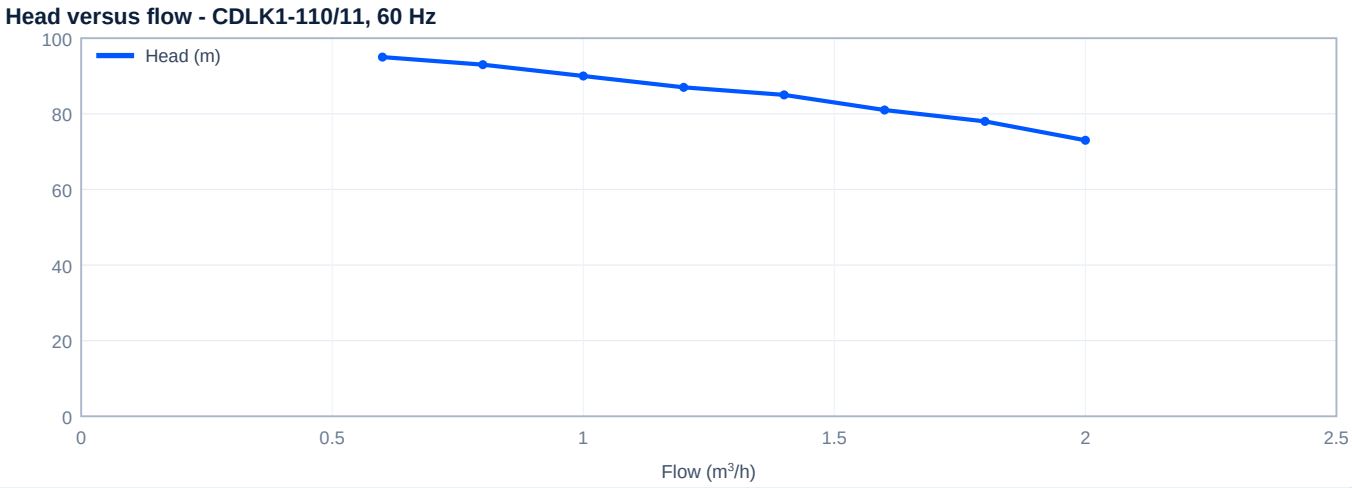

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
0.6	95
0.8	93
1	90
1.2	87

Flow (m^3/h)	Head (m)
1.4	85
1.6	81
1.8	78
2	73

Dimensions (mm)

Code	Description	Value
A	A — overall height	643
B	B — immersion length	285
C	C — motor height	358
D	D	142
D1	D1 — motor diameter	170
-	Net weight	22

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261030-ED7EA. Contact: +92 345 9547419 sales@cnppakistan.com