

NSW-L100

NSW (pool, stainless) | Swimming-pool circulation pump



CNP-M-000336

Scan to open this online



FLOW RANGE

3 - 24 m³/h

HEAD RANGE

4 - 14 m

MOTOR

0.75 kW

SPEED


3450 rpm

Specifications

Series	NSW (pool, stainless)
Size	NSW-L100
Mains frequency	60 Hz
Speed	3450 rpm
Motor power	0.75 kW (1 hp)
Max pressure	3 bar
Connection	Union joint, metric (GB) or inch (ANSI)
Data basis	Published performance curve (Pool pump catalogue, printed p. 9)

Performance curve

Head versus flow - NSW-L100, 60 Hz

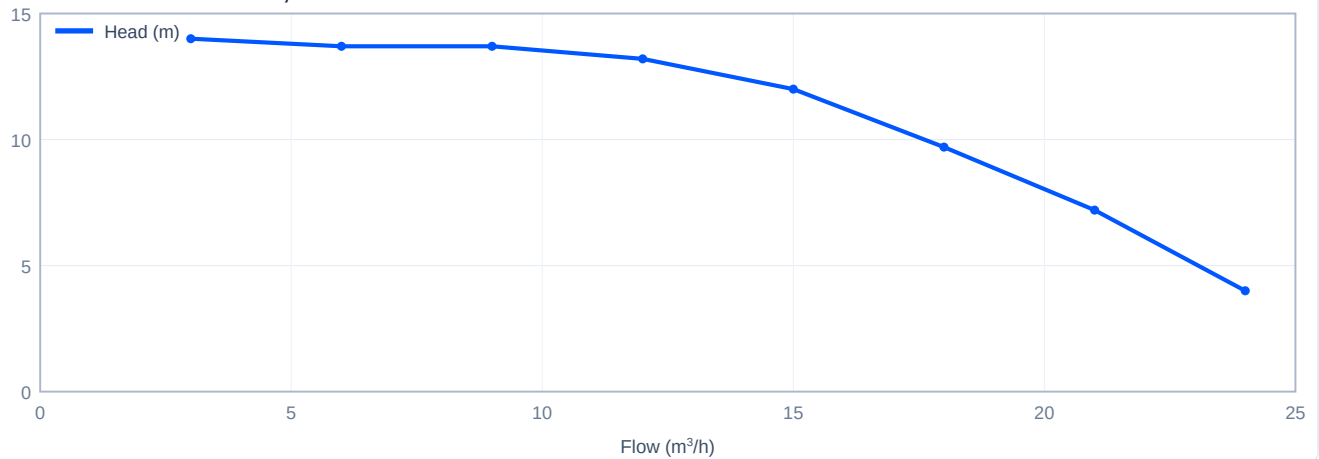

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
3	14
6	13.7
9	13.7
12	13.2
15	12
18	9.7



Flow (m³/h)	Head (m)
21	7.2
24	4

Dimensions (mm)

Code	Description	Value
L	L — overall length	490

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-67C01. Contact: +92 345 9547419 sales@cnppakistan.com