

SJ1-21

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-000860

Scan to open this online



FLOW RANGE

0.2 - 2 m³/h

HEAD RANGE

69 - 119 m

MOTOR

1.1 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ1
Stages	21
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	1.1 kW (1.5 hp)
Max pressure	28 bar
Connection	Thread Rp1¼
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 5))

Performance curve

Head versus flow - SJ1-21, 50 Hz

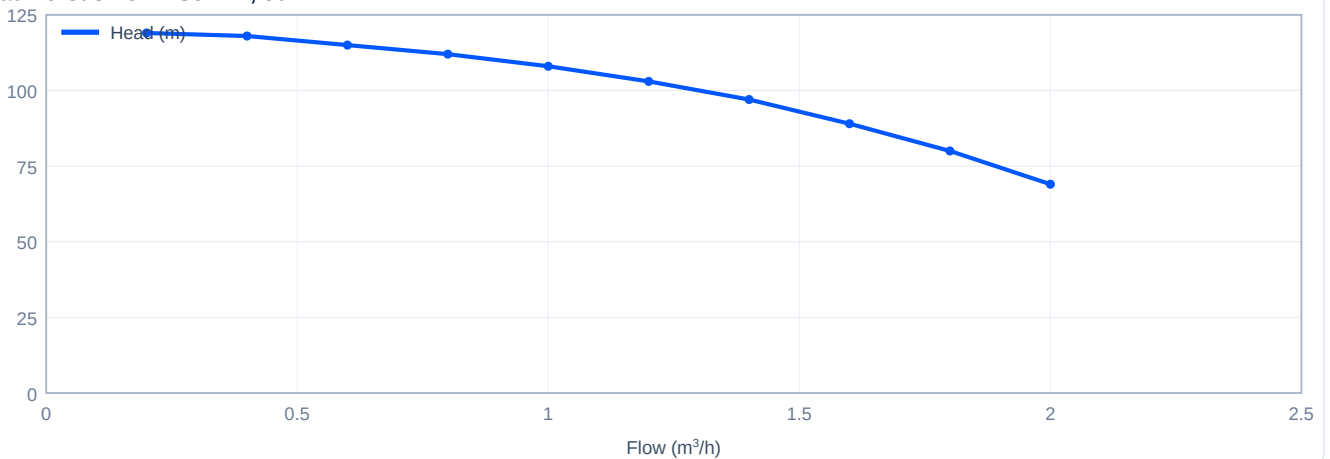

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0.2	119
0.4	118
0.6	115
0.8	112
1	108



Flow (m³/h)	Head (m)
1.2	103
1.4	97
1.6	89
1.8	80
2	69

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-DC7AE. Contact: +92 345 9547419 sales@cnppakistan.com