CNP PUMPS PAKISTAN

SJ8-37

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump

CNP-M-001837

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
2 - 11 m³/h	**82 - 201 m**	**5.5 kW**	**2850 rpm**

Specifications

Series	**SJ (deep-well submersible)**
Size	**SJ8**
Stages	**37**
Mains frequency	**50 Hz**
Speed	**2850 rpm**
Motor power	**5.5 kW (7.5 hp)**
Max pressure	**27 bar**
Connection	**Thread Rp2**
Data basis	**Published performance curve (Performance table, SJ size page (PDF p. 8))**

Performance curve

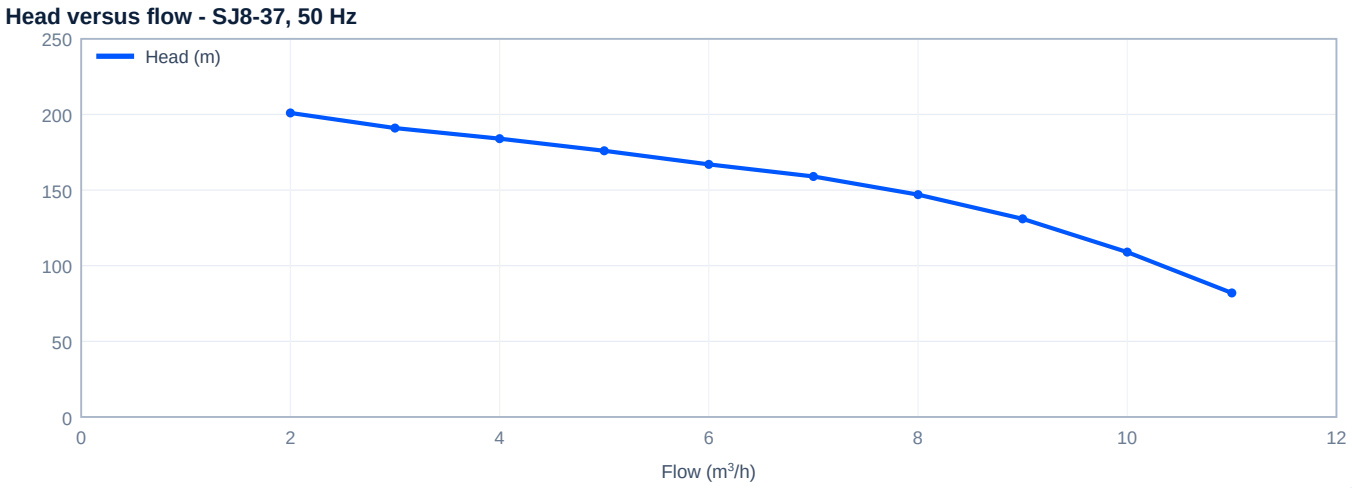

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
2	201
3	191
4	184
5	176
6	167

Flow (m^3/h)	Head (m)
7	159
8	147
9	131
10	109
11	82

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-3D992. Contact: +92 345 9547419 sales@cnppakistan.com